



100mm thick, U shaped precast concrete cover/riser slab to BS5911 (Allowable alternative to brickwork)



NOTES:

- 1. All dimensions are in millimetres unless otherwise stated.
- See Drg No SD/5/11A for General Notes.
- 3. See Drg No SD/5/12 for notes on setting and adjustment of ironwork.
- 4. The Contractor/Developer shall provide a pump or gully emptier vehicle and operator(s) to enable a complete internal inspection of the gully at the end of the maintenance period at a time and date arranged with the Engineer's representative. The costs to be borne by the Contractor/Developer.

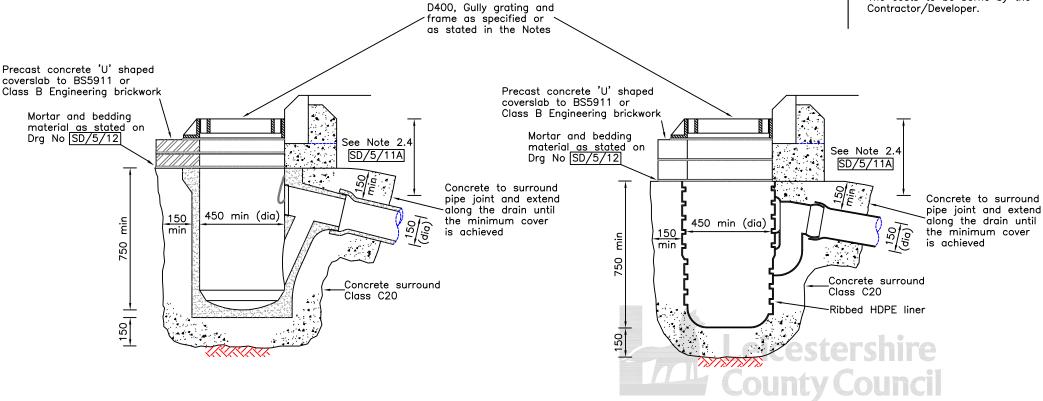

PRECAST CONCRETE OR CLAY GULLY CROSS SECTION

IN SITU CONCRETE GULLY CROSS SECTION

©Crown copyright 2007. All rights reserved. Use of this image is limited to viewing on-line and printing one copy. Leicestershire County Council 100019271.



TRANSPORTATION AND

WASTE MANAGEMENT

TITLE:

STANDARD DRAWING

DRAINAGE

TRAPPED ROAD GULLY - DESIGN GROUP 1

DRAWING NUMBER	DATE				
SD/5/13	SEPTEMBER 2002				
AUTOCAD REF		SCALE			
K:\GENERAL\D9997STDDRG\SD513					
		NOT TO SCALE	Rev	Date	Notes on Revision